

GENERAL DESCRIPTION

LED luminaire for wall mounted installation. Polycarbonate lens with aluminum body, painted brown. No UV or IR in the beam. Easy to install and operate. Energy saving with a long lifespan. Light is soft and uniform, safe to the eyes. Instant start with no humming. Green and eco-friendly without mercury. Ideal for entrance lighting, courtyard lighting, industrial lighting, outdoor landscape lighting, hotels, wall lighting areas, etc.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.



*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.

Specifications are subject to change. Please confirm latest specifications prior to placing order.

ELECTRICAL

3000K 4000K 5000K

120V - 347V

L80 performance at 60,000 hours minimum.


80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available, consult factory.

FINISH

High gloss grey polyester baked powder coat enamel.



PHOTOMETRIC DATA

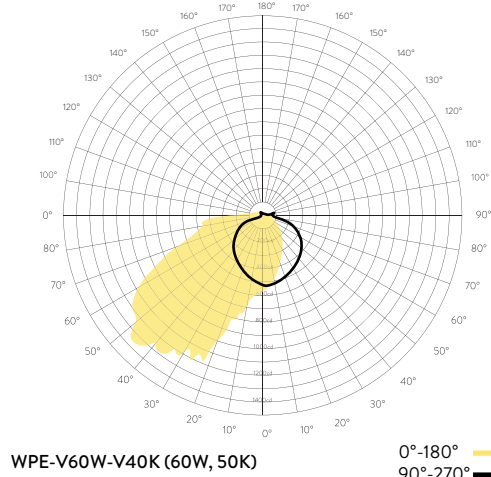


WPE-V60W-V40K (60W, 50K)

0°-180°
90°-270°

DIMENSIONS

L (A)	L (B)	W	H
13.74" (349mm)	12.99" (330mm)	9.25" (235mm)	4.29" (109mm)

MOUNTING

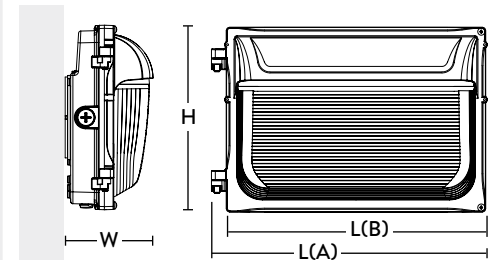

WALL MOUNTED



ORDERING INFORMATION

WPE			P	MV3
FIXTURE	WATTAGE	CCT	CONTROLS	DRIVER
WPE = Wall . Pack . Evalux	V60W = 30W/40W/60W V120W = 80W/100W/120W	V40K = 3000K / 4000K / 5000K	P = Photocell	MV3 = 120V-347V, 10% Dimming (0-10V)



DIMENSIONS

L (A)	L (B)	W	H
13.74" (349mm)	12.99" (330mm)	9.25" (235mm)	4.29" (109mm)



SHIELDING

Polycarbonate lens.

CONSTRUCTION

Aluminum.

FINISH

High gloss grey polyester baked powder coat enamel.



LED LIGHT ENGINE

Mounted on internal high reflectance grey painted reflector.

LED DRIVER

10% Dimming (0-10V).

ELECTRICAL

3000K 4000K 5000K

120V - 347V

L80 performance at 60,000 hours minimum.

80 CRI Standard. Other dimming options, lumen options, 90CRI and lengths available, consult factory.

CERTIFICATION

Approved to UL1598 and CSA C22.2 No. 250 standards**

Suitable for damp locations.




*LED Five (5) year limited warranty.

**Operating temperature: -20°C to +35°C / -4°F to +95 °F, consult factory for operating temperatures outside the listed range.

***Not all available products are DLC qualified. View DLC Qualified Products List at designlights.org to confirm which versions are qualified.


MOUNTING

Wall mounted with screws.



WALL MOUNTED

PHOTOMETRIC DATA

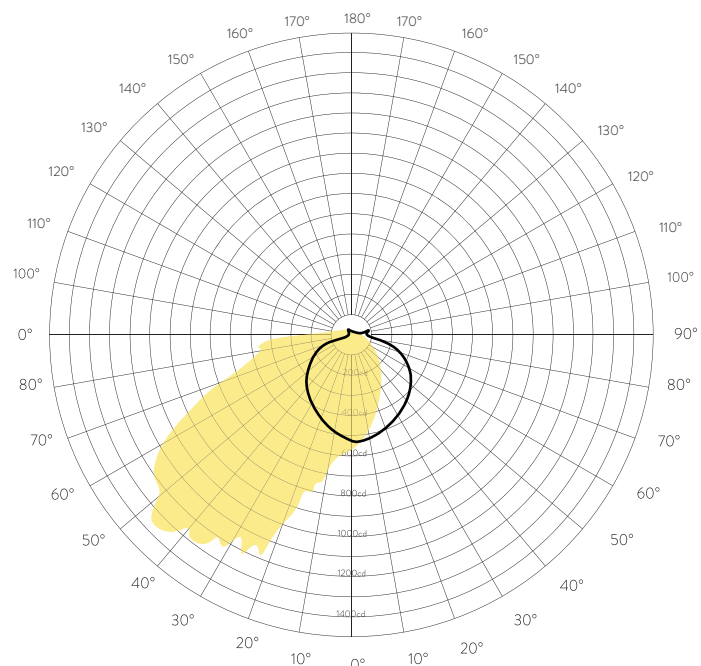

WPE-V60W-V40K (60W, 50K)

0°-180° ■
90°-270° ■